


# Drone Parachute System

-Industrial Drone Parachute Series

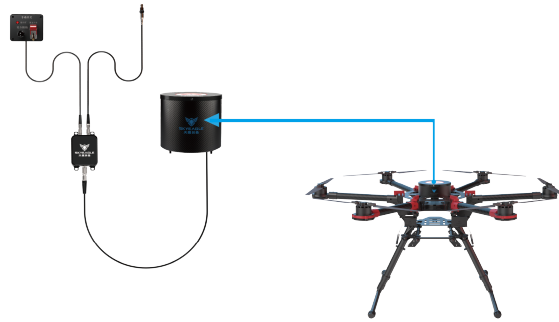

## Performance Specifications

| Model  | T200-15  |
|--|--|
| Maximum Deployment Weight                                    | 15kg   |
| Maximum Deployment Speed                                     | 110 km/h   |
| System Weight  | 0.72kg   |
| Container Dimensions (mm)                                    | Φ169*68mm  |
| Deployment Time  | 1.2 s  |
| Minimum Deployment Altitude                                  | 25m  |
| Maximum Deployment Load                                      | 5.5g   |
| Maximum Descent Speed (at 1500 m AMSL, standard temperature) | 5 m/s(equivalent to a fall from 1.3 meters)        |
| Parachute Shape  | Square   |
| Main Canopy Area   | 7 m <sup>2</sup>                                   |
| Operating Temperature  | -20~60°C   |
| Protection Rating  | IP55   |
| Parachute Activation Method                                  | Flight Control Activation<br>Autonomous Activation |
| ECU Communication Protocol                                   | CAN/RS-232/PWM                                     |
| Black Box Functionality                                      | Yes  |
| System Service Life  | 2years   |

**\*Customized Service Available**

### Contact

Tel: +86 159 7530 6533

E-mail: [sales@skyeagleparachute.com](mailto:sales@skyeagleparachute.com)

Web: [www.skyeagleparachute.com](http://www.skyeagleparachute.com)

Address:

Building A1, Zhongjia Creative Park,  
Donghuan Second Road, Longhua District,  
Shenzhen City, Guangdong Province, China.

Copyright Reserved © Shenzhen SkyEagle Technology Co., Ltd.



Website